


**Question:** What should I do before starting trading using Binance Smart Chain or Matic networks?

**Answer:** As you know, Ethereum blockchain is already implemented on MetaMask and that's the default running network. If you want to trade BEP20 (BSC) tokens you'll need to add Binance Smart Chain into MetaMask. The same process will be for adding Matic or any other network.

Step 1: Click on the top-right circle and head to **Settings**

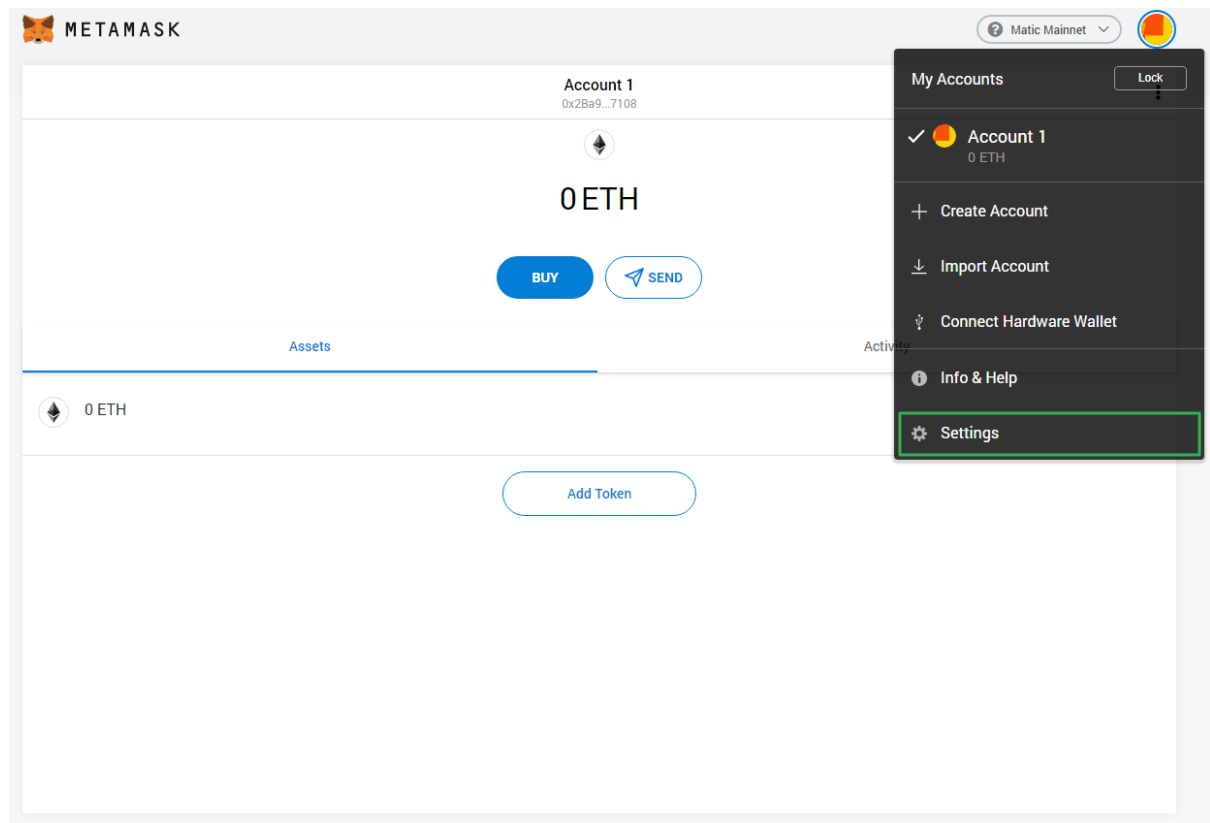

Step 2: After Settings was accessed, locate and click **Networks**

Step 3: On the top-right corner click **Add Network** to manually add Binance Smart Chain (or any other blockchain)

Step 4: Add the details written down below for your blockchain of interest


***Binance Smart Chain Network***

**Network Name:** Binance Smart Chain Mainnet

**New RPC URL:** <https://bsc-dataseed.binance.org/>

**ChainID:** 56 (*\*if it's not working, try 0x38*)

**Symbol:** BNB

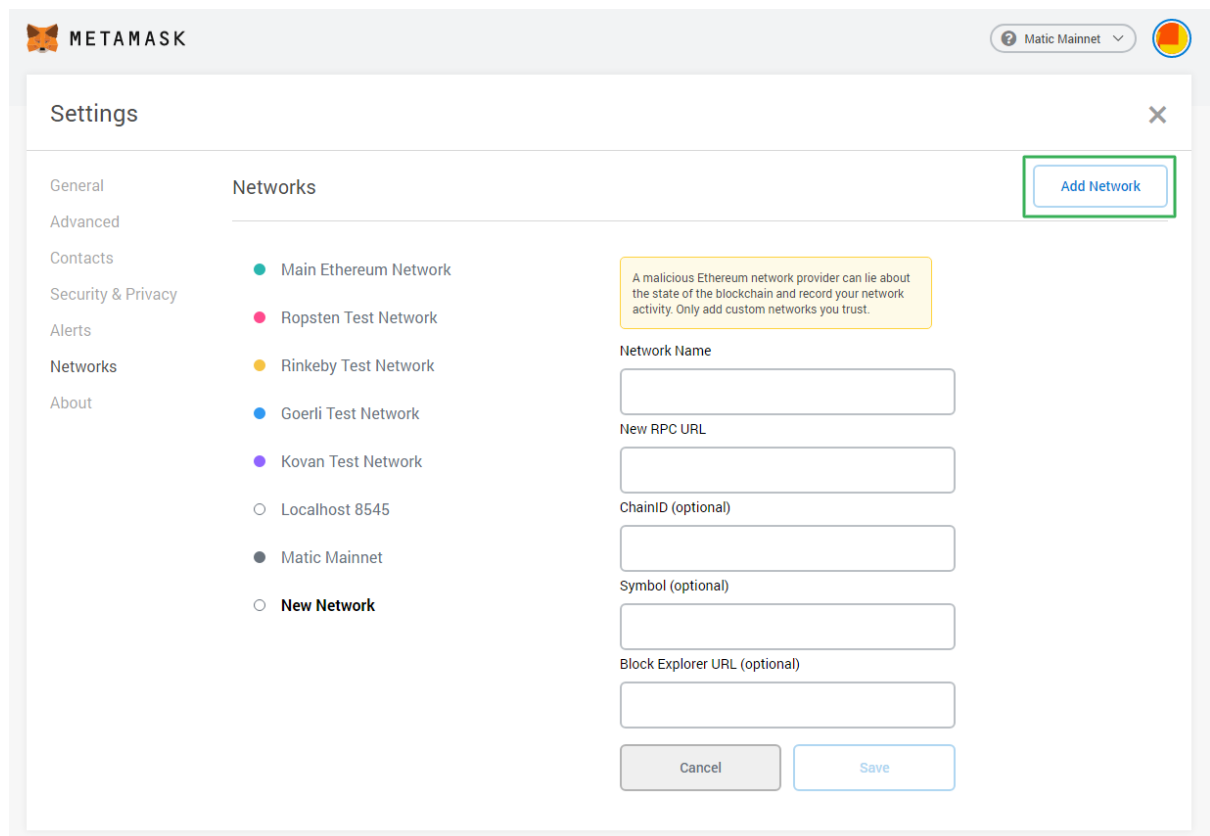

**Block Explorer URL:** <https://bscscan.com>

### ***Matic Network***

**Network Name:** Matic Mainnet

**New RPC URL:** <https://rpc-mainnet.matic.network/>

**ChainID:** 137 (*\*if it's not working, try 0x89*)

**Symbol:** MATIC

**Block Explorer URL:** <https://explorer.matic.network>

Step 5: Click **Save** and you are ready to go!

**Remember!** Before starting trading, identify your nature of your tokens and select their corresponding Network. To swap between the Networks just click on the top-right on the name of the current Network selected and you'll get a drop-menu with all the Networks available.



## Settings

General

Advanced

Contacts

Security & Privacy

Alerts

**Networks**

About

### Networks

☒ Main Ethereum Network

☐ Ropsten Test Network

☐ Rinkeby Test Network

☐ Goerli Test Network

☐ Kovan Test Network

☐ Localhost 8545

☐ Matic Mainnet

☒ **Binance Smart Chain**

A malicious Ethereum network provider can lie about the state of the blockchain and record your network activity. Only add custom networks you trust.

Network Name

Binance Smart Chain

New RPC URL

https://bsc-dataseed.binance.org/

ChainID (optional)

56

Symbol (optional)

BNB

Block Explorer URL (optional)

https://bscscan.com

Cancel

Save

### Networks

The default network for Ether transactions is Main Net.

☒ Main Ethereum Network

☐ Ropsten Test Network

☐ Kovan Test Network

☐ Rinkeby Test Network

☐ Goerli Test Network

☐ Localhost 8545

☒ **Binance Smart Chain**

☐ Matic Mainnet

☐ Custom RPC